


## Ondra


### Technical Specifications

Manufacturing process	Tufted
Gauge	1/10" Loop Pile-tonal
Pile material	100% Polyamide
Pile weight	530 g/m <sup>2</sup>
Total weight	2.000 g/m <sup>2</sup>
Pile height	3,0 mm
Total height	5,5 mm
Number of tufts	144.000 /m <sup>2</sup>
Flammability	ISO 13501-1 Cfl - S1
Sound absorption coefficient	ISO 354 2.000 Hz
Impact noise rating	ISO 140-8 21dB
Thermal insulation rating	ISO 8302 ≤0,17m <sup>2</sup> K/W
Boby voltage	ISO 6356 ≤2 kV
Earth discharge time	≤ 10 <sup>9</sup> R <sub>EF</sub> Ohm IEC 1340-4
Light fastness	EN ISO 105-B 02 ≥5
Water fastness	EN ISO 105-E 01 ≥4
Abrasion resistance	wet ≥3 EN ISO 105-X 12 dry ≥4
Backing	Actionbac
Width	400 / 500 cm




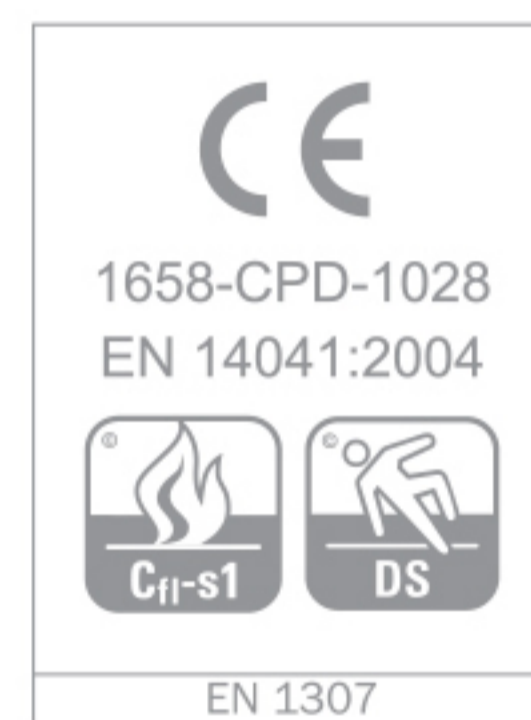


590

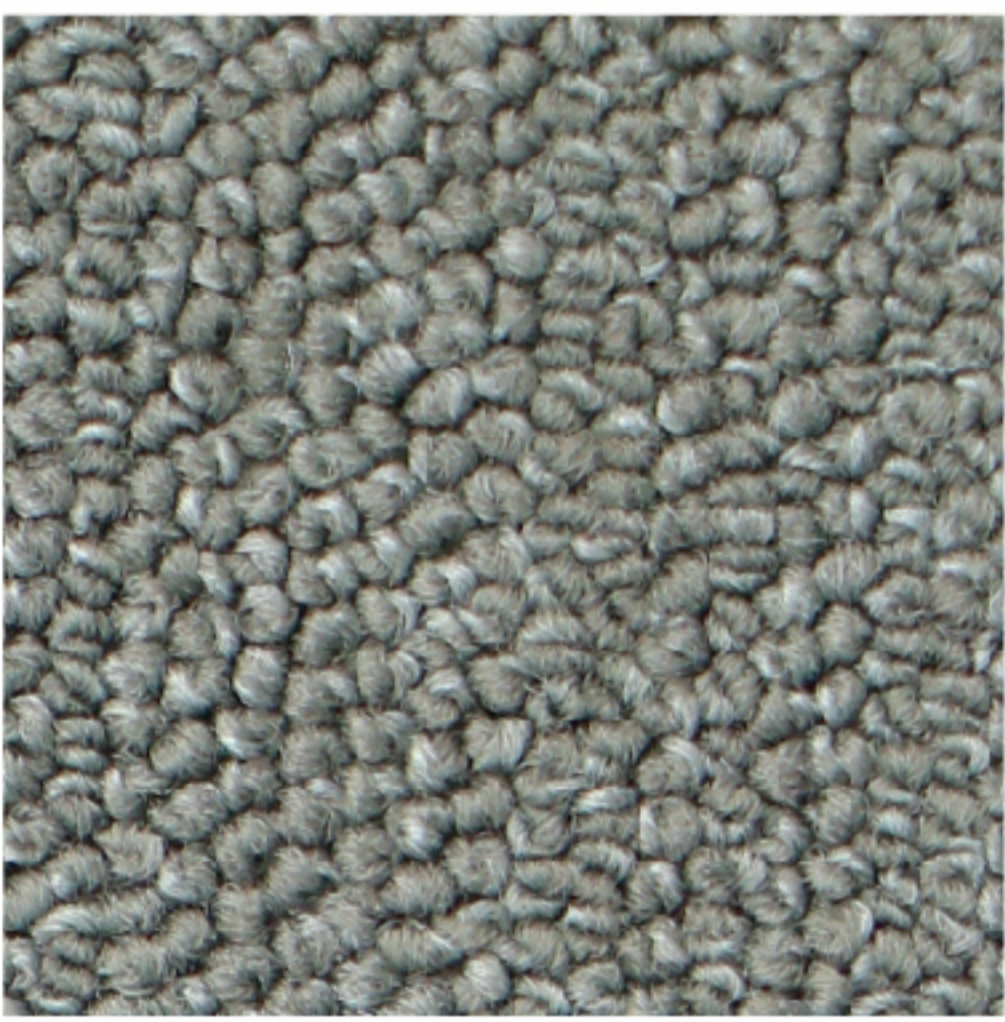

520

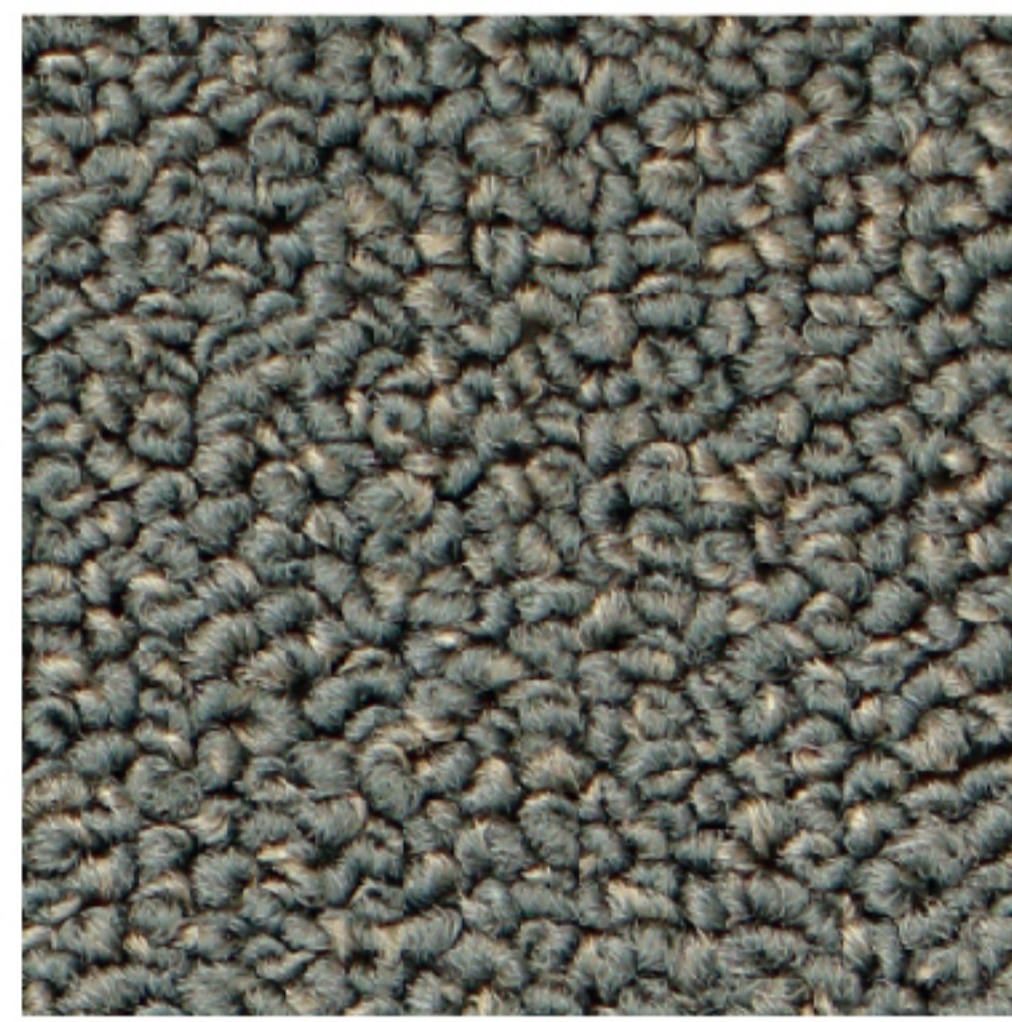

550

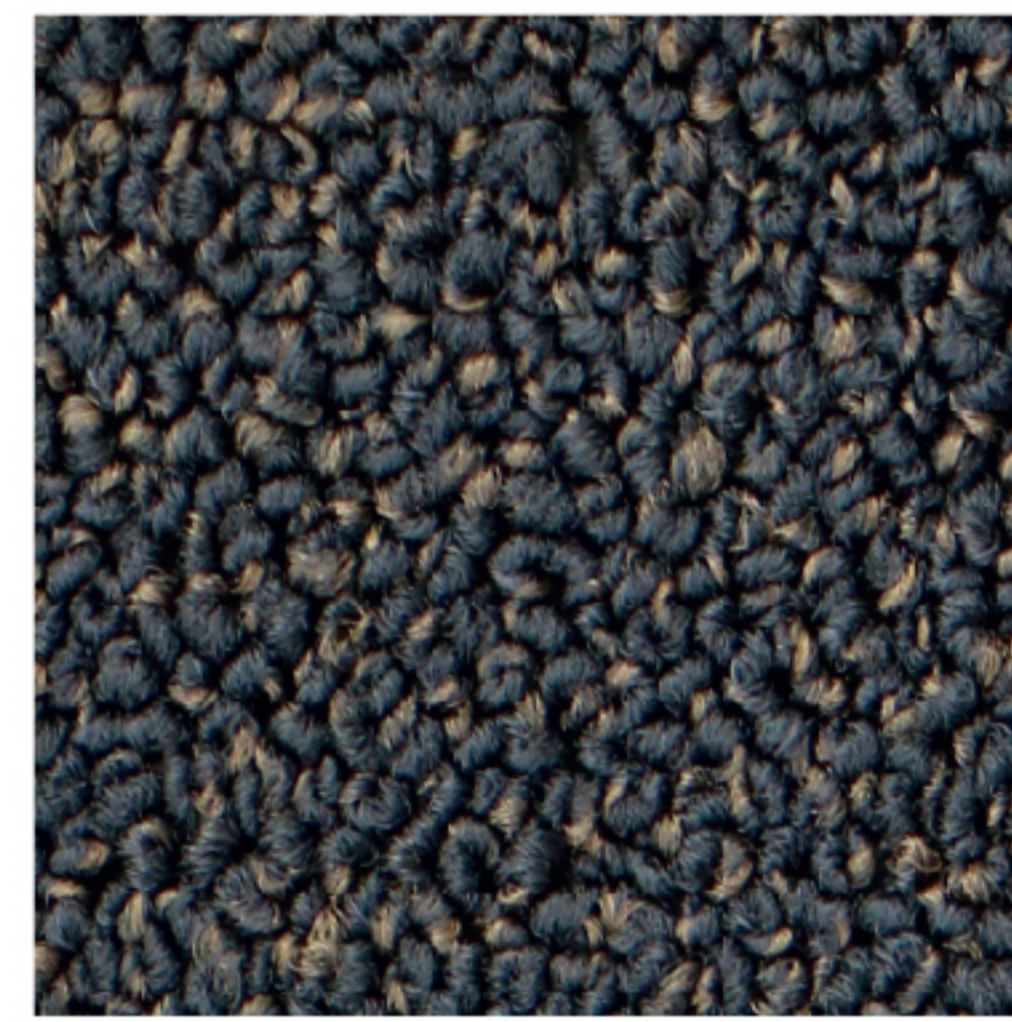

590



780



960



920




820



860




270

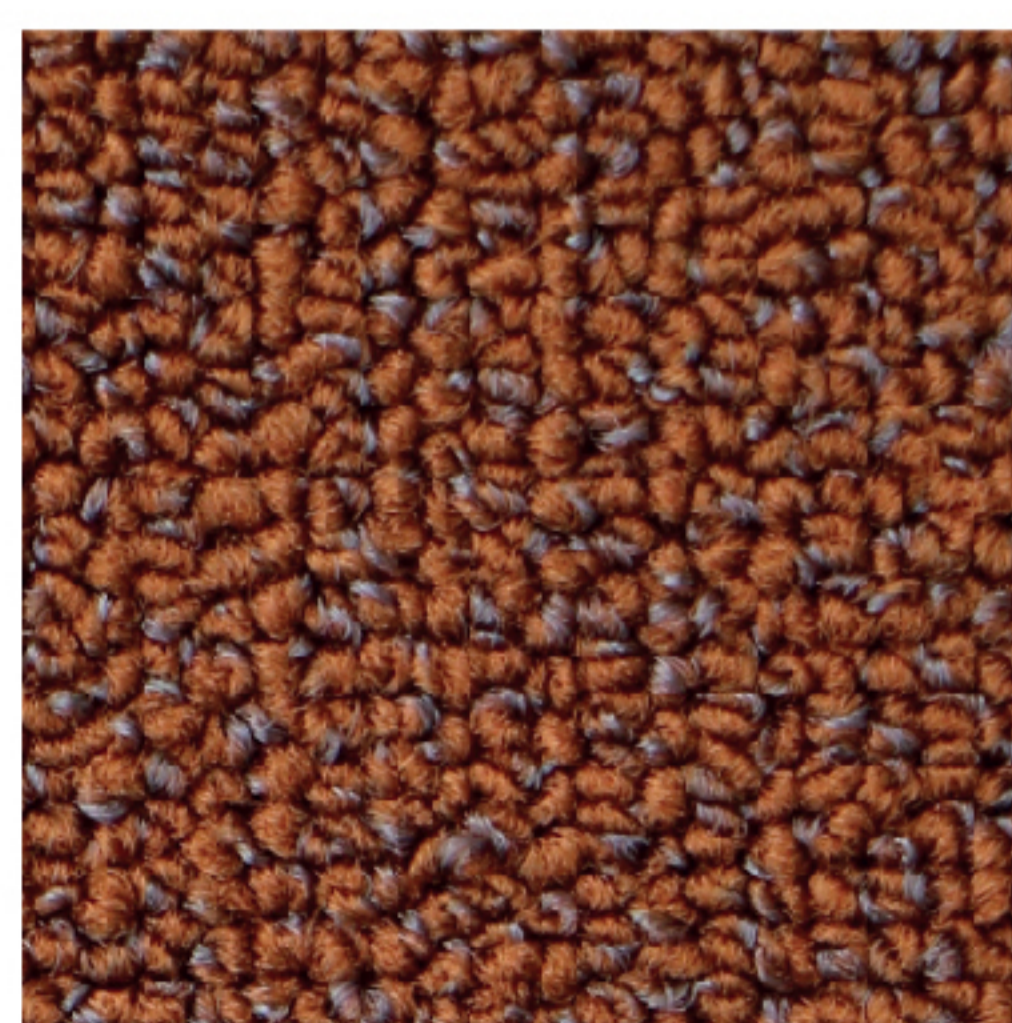


060




150

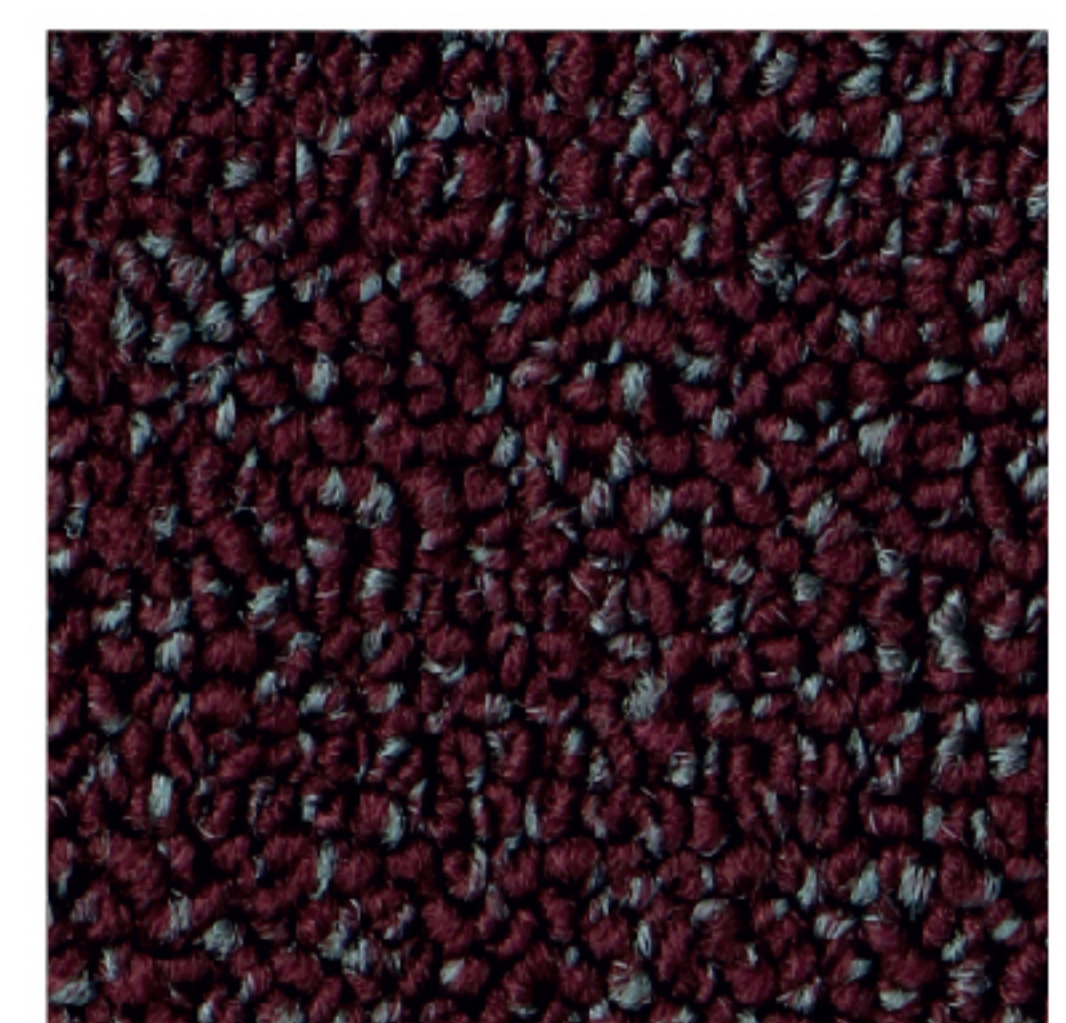

680

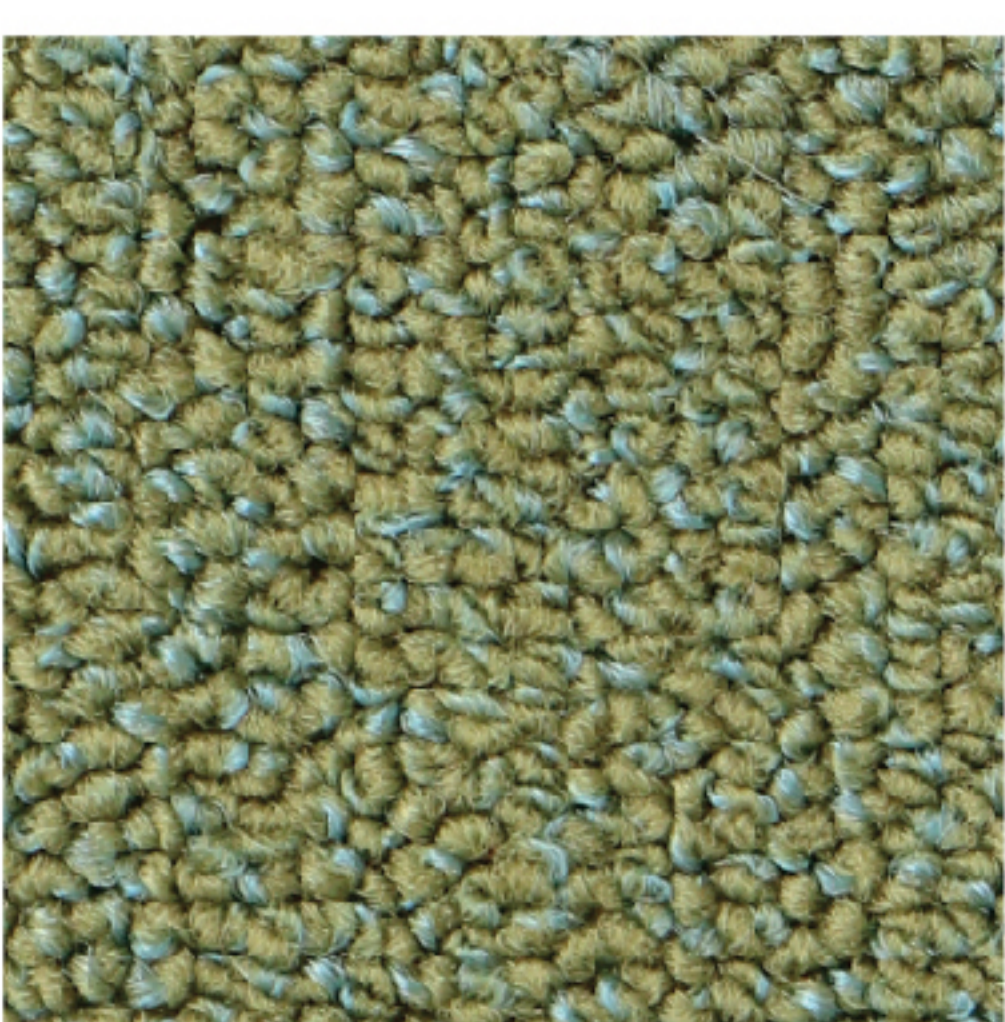


430

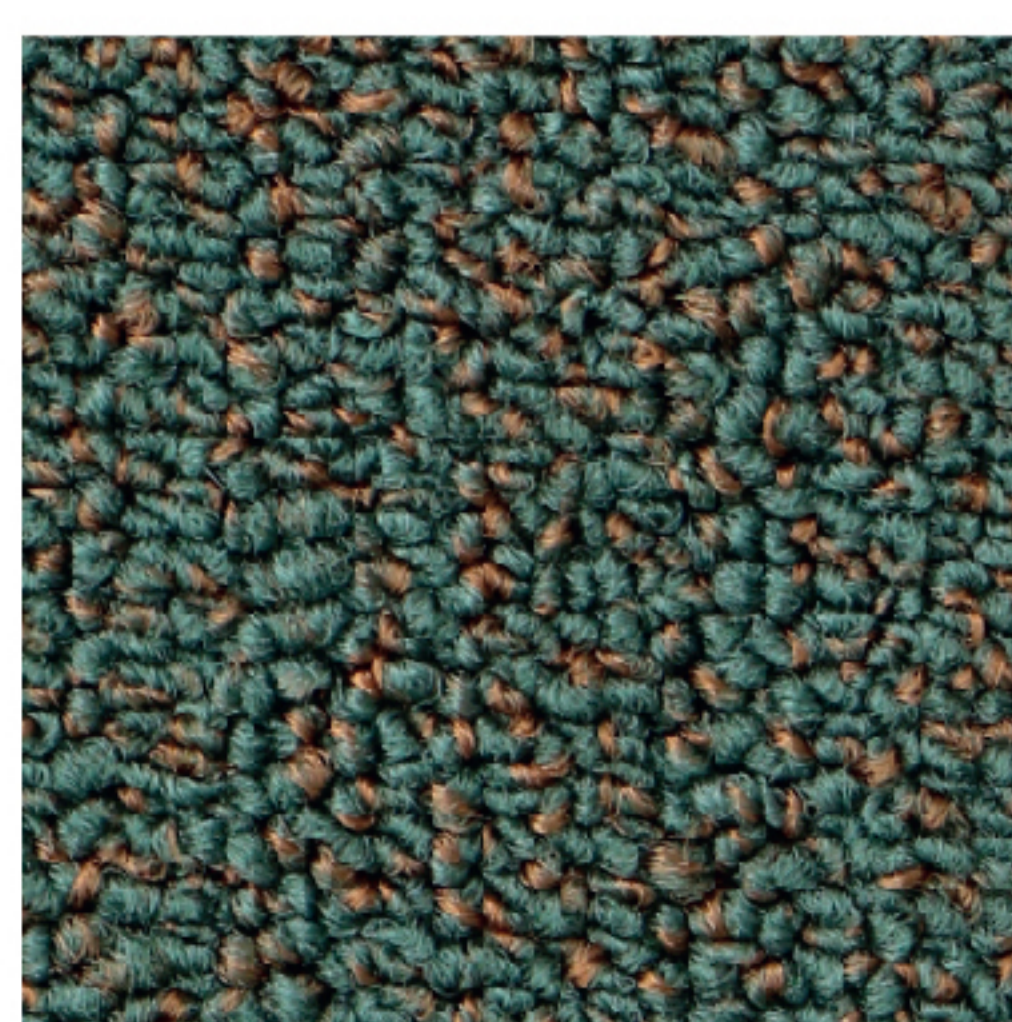

460



340

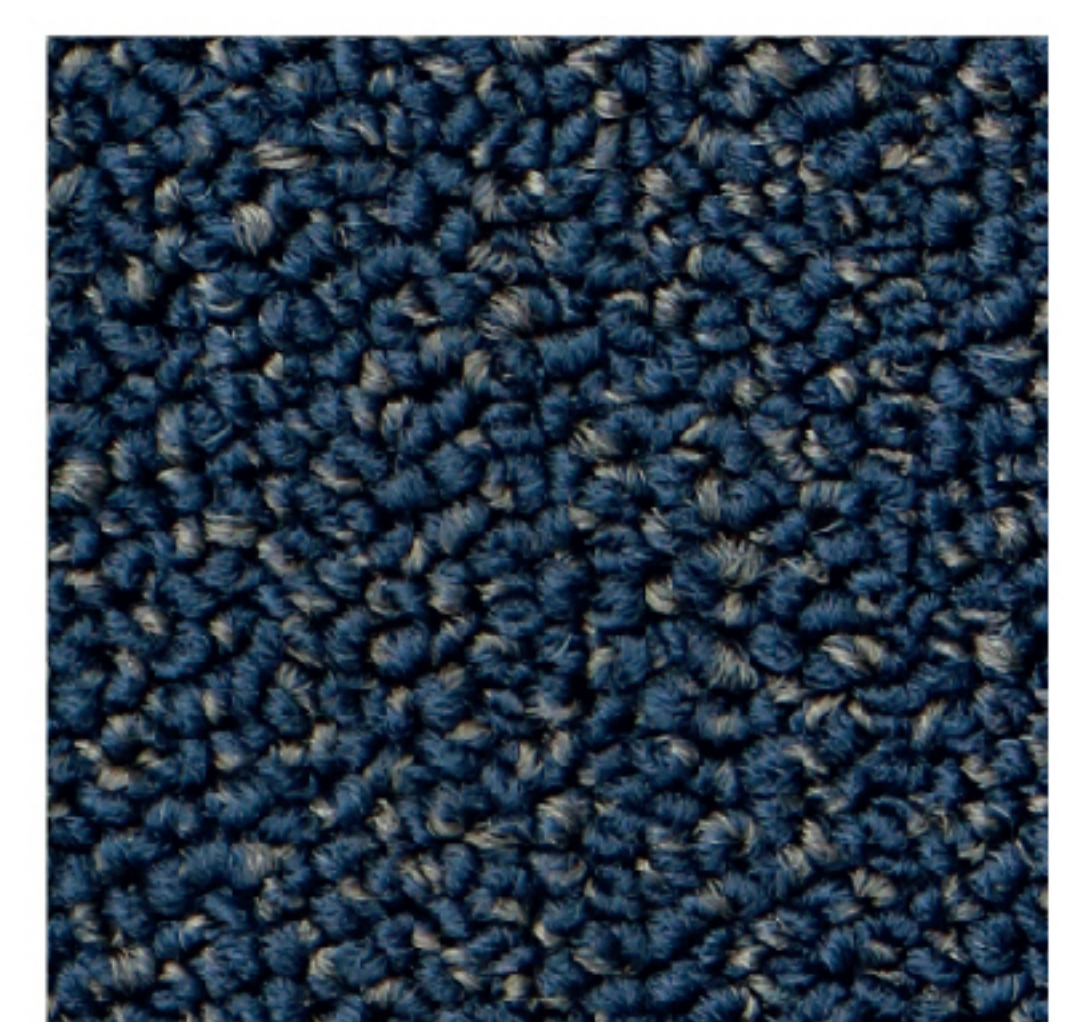

380